

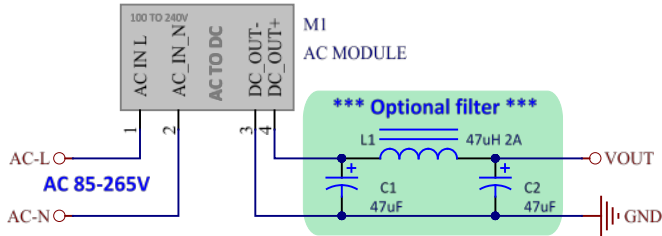
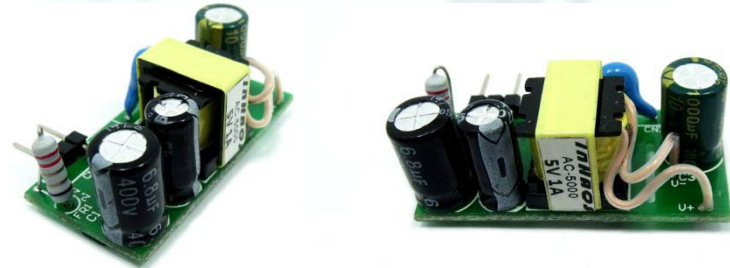


AC-5000

5W AC to DC Switching Power Supply Module

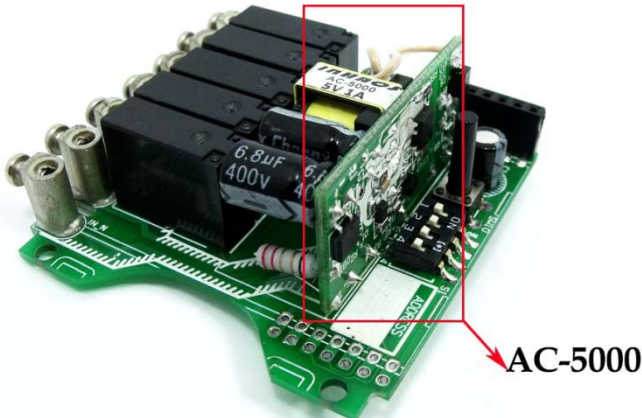

- AC-5000-5V: 5V 1A
- AC-5000-9V: 9V 600mA
- AC-5000-12V: 12V 500mA

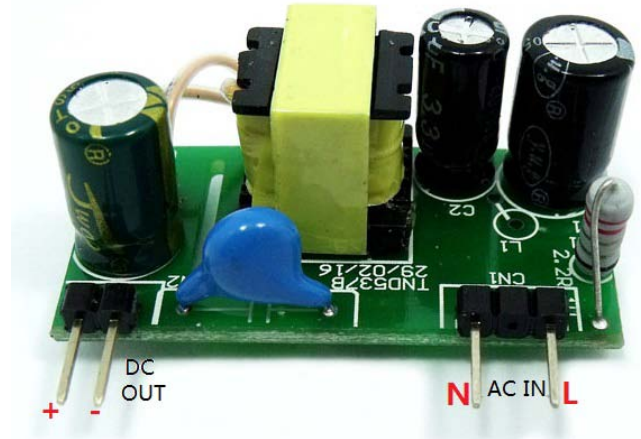

Features & Parameters

- 85 to 265V AC 50/60Hz input range
- Temperature protection
- Over-current protection and short circuit protection
- 5V 1A / 9V 600mA / 12V 500mA selectable
- Size : 40x17x20 mm
- Compact design, suitable for a variety of purposes.
- Input Voltage: AC 85V to 265V 50/60Hz
- Output Accuracy: +-5%
 - AC-5000-5V: 4.75V to 5.25V
 - AC-5000-9V: 8.55V to 9.45V
 - AC-5000-12V: 11.4V to 12.6V
- Maximum continuous output current:
 - AC-5000-5V: 1A
 - AC-5000-9V: 600mA
 - AC-5000-12V: 500mA
- Storage temperature: -55°C--+150°C
- Working temperature: 0°C--+125°C

Notes:

- This product is exposed bare circuit board, high voltage on the board, please pay attention to safety.**
- Users must have professional electrician skills to ensure use of the process does not result in an electric shock.**
- AC input circuit must ensure enough safety distance, and there are clear warning labels.**

Contact us

INHAOS Headquarter: :

1111 Oakmont Drive #C, San Jose, CA 95117

E-mail : support@inhaos.com

INHAOS China office: :

No.6 Building,Songke Estate,Songshan Lake National Hi-tech Industrial Development Zone,Dongguan,Guangdong Province, 523808,China

E-mail: Support@inhaos.com